



HOSHIZAKI

> IM-220AA

Daily ice production capacity up to 190 KG



The Hoshizaki cube is characterized by its clean edges and its transparency streaked by a marbling effect. When the CELL WALLS block the freezing water's expansion from all sides, while reaching up to -30°C during the cubing process. As the temperatures go down, the water keeps expanding and marbles start to form as a sign of extreme density and compactness of every single cube.



> Picture with Ice bin B-301SA


CUBE ICE MAKER SERIES

I-FIT
SERIES

FEATURES

- > Zero clearance rear design for easy installation
- > Round front door and easy access to ice
- > Pull out air filter design for easy cleaning
- > Front water valve access for easy servcability
- > Stainless steel exterior provides hygienic and high qualified finish

ICE SIZE

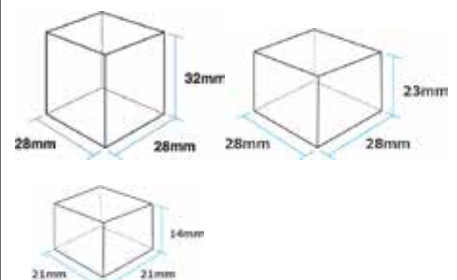

MARBLE EFFECT




- > Individual cube > Impurity free
- > Hardest ice to enjoy slow melting and dilution of drinks

CERTIFICATION




DIMENSIONS & SPECIFICATION


TOP SIDE




FRONT SIDE

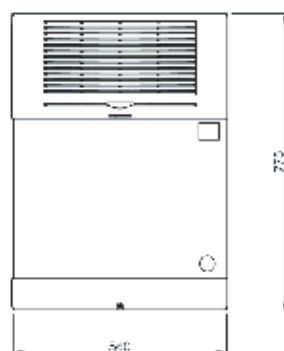

RIGHT SIDE

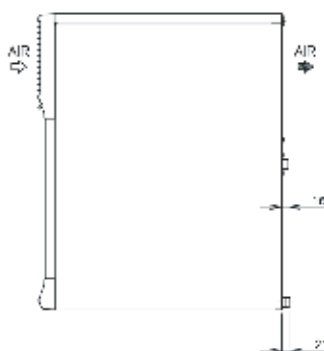

BACK SIDE

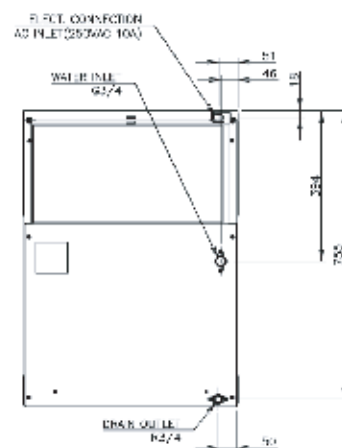

| | |
|--|--|
| IM-220AA | |
| ICE DIMENSIONS (WxDxH) | 28 x 28 x 32mm (Standard size) 28 x 28 x 23mm (23 mm size) <i>*Indent Basis</i> 21 x 21 x 14mm (21 mm size) <i>*Indent Basis</i> |
| DIMENSIONS (WxDxH) | 560 x 639 x 775 mm |
| PACKAGE DIMENSIONS (WxDxH) | 644 x 728 x 878 mm |
| WEIGHT (NET/GROSS) | 69 KG / 76 KG |
| AMPERAGE / STARTING AMPERAGE | 5.3 A / 38 A |
| ELECTRICAL CONSUMPTION (AT32°C/WT21°C) | 950 W |
| REFRIGERANT CHARGE | R404A / 500g |
| HEAT REJECTION (AT32°C/WT21°C) | 2250 W 1936 kcal/h |
| ICE PRODUCTION PER 24H (5MM) | (AT10°C/WT10°C) 190 kg |
| | (AT21°C/WT15°C) 180 kg |
| | (AT32°C/WT21°C) 160 kg |
| ICE PRODUCTION PER CYCLE (AT32°C/WT21°C) | Approx. 3.2 KG / 140 pcs FREEZE CYCLE TIME PER CYCLE 27 minutes |
| WATER CONSUMPTION PER 24H (AT32°C/WT21°C) | 0.27 m ³ ≈ 1.5 L / 1 KG ice |

NOTE:
All dimensions indicated are
Width x Depth x Height in mm
*60Hz units are available on request

OPERATING CONDITIONS:

• Voltage Range: 198V-254V • Ambient Temperature: 1°-40°C • Water Supply:
5°-35°C / 0.07-0.78 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50Hz